

4004EH


Specifications

Weight	920 lbs (417 kgs)
Length	9' 10.5" (3 m)
Width	1' 10" (.56 m)
Height	2' 3" (.69 m)
Base Plate Dimensions	16.75" x 13.5" (.43 m x .34 m)
Boom Down	14-20 seconds (full stroke of cylinder)
Boom Retract	TBD
Full 360° Boom Rotation	41-57 seconds

*Truck must be equipped with appropriate outriggers, minimum 75-amp alternator, minimum 130-minute reserve capacity H.D. maintenance-type battery with 575 cold cranking amp capacity.

Lifting Capacities

Reach	Manual/Power Boom Extension
3' (.9 m)	4,000 lbs (1,814 kgs)
4' (1.22 m)	4,000 lbs (1,814 kgs)
5' (1.5 m)	3,200 lbs (1,452 kgs)
6' (1.8 m)	2,667 lbs (1,210 kgs)
7' (2.1 m)	2,286 lbs (1,037 kgs)
8' (2.4 m)	2,000 lbs (907 kgs)
9' (2.7 m)	1,778 lbs (807 kgs)
10' (3.0 m)	1,600 lbs (726 kgs)
11' (3.3 m)	1,455 lbs (660 kgs)
12' (3.7 m)	1,333 lbs (605 kgs)
13' (3.9 m)	1,231 lbs (558 kgs)
14' (4.3 m)	1,143 lbs (518 kgs)
15' (4.6 m)	1,067 lbs (484 kgs)
16' (4.9 m)	1,000 lbs (454 kgs)

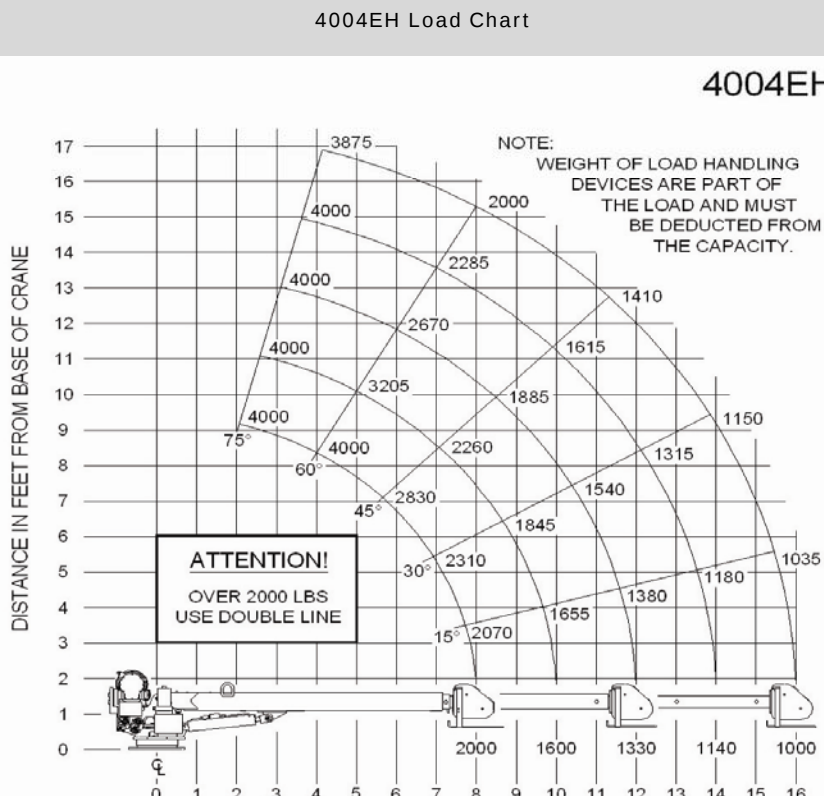

Auto Crane Company / 4707 N. Mingo Rd. Tulsa, OK 74117
918-836-0463 / AutoCrane.com

