


PUMPER/CLEANER REELS

by Hannay

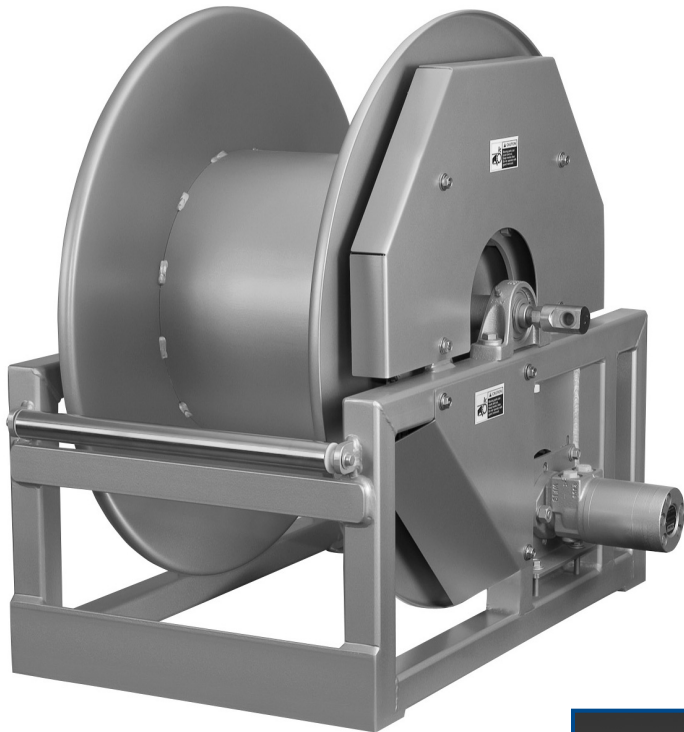

Heavy Duty Custom Model

Standard Features

- Heavy Duty Reel for long lengths
- Inlet - 1" F NPT - 90° Ball Bearing swivel joint
- Outlet - 1" F NPT
- #50 Chain & Sprocket Drive - Hydraulic powered
- Steel-Hub Assembly - outlet Riser & Inlet
- 2" Square Tubing Frame
- Pillow Block Ball Bearings
- 3/16" or 1/4" Thick Rolled Discs
- Full Chain Guard
- Single hose roller supplied

Options

- 1/2" I.D. plumbing for 10,000 PSI
- 1" I.D. plumbing for 5000 PSI
- MX Auxiliary Rewind
- Other Optional Roller assemblies available



N700 Series



1500 Series


Remember Hannay Reels Added Values

- Discs are heavy gauge with rolled edges to offer maximum strength.
- Frames are of a superior modular design, many with E-coated protection against erosion.
- Bearings on each side of spool offer superior wear life and ease of future maintenance.
- Roller arms are adjustable and doubled for minimum lateral movement.
- Swivel joints allow for ease of future repair/replacement. Seal design well proven in the industry. Pressure ratings to 10,000 psi.
- Ratchets are now spaced equally across the diameter to minimize reel rotation for hose deployment, non-sparking metals are used.
- Springs mounted outside the frame with declutching arbor to protect against accidental reverse winding.





Phone 518-797-3791
Toll Free 1-877-GO REELS
Fax 1-800-REELING (USA)
www.hannay.com

PUMPER/CLEANER PRICING EXAMPLES

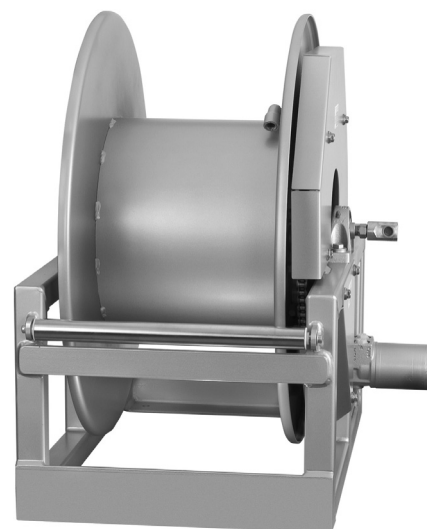

Hannay
custom reels for
any purpose.
Built to your
specifications.

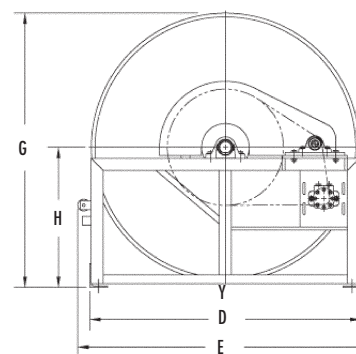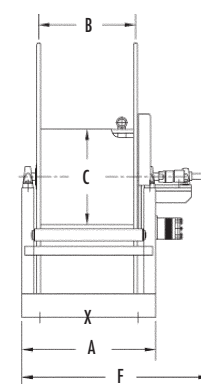

Hannay Sewer Cleaning Reels

For 1/2" ID Hose - **HD60xx-33-34-16 RT**; Parker 12 cubic inch hydraulic motor, #50 chain drive with 24T & 96T sprockets, 2" square tubing frame, pillow block ball bearings, 3/16" thick rolled discs, 16" schedule 30 pipe drum, barstock hub, 1/2" M x F 90° Super Swivel, 1/2" F NPT riser, assembly A roller, full chain guard, paint silver.
Max Working Pressure: 5,000 psi.

\$3,250 List
(add **\$125** for 10,000 psi)

For 3/4" ID Hose - **HD60xx-39-40-16 RT**; Parker 20 cubic inch hydraulic motor, #50 chain drive with 24T & 96T sprockets, 2" square tubing frame, pillow block ball bearings, 1/4" thick rolled discs, 16" schedule 30 pipe drum, barstock hub, 1" F x F 90° Super Swivel, 3/4" F NPT riser, assembly A roller, full chain guard, paint silver.
Max Working Pressure: 3,000 psi.

\$3,950 List
(add **\$36** for 5,000 psi)

For 1" ID Hose - **HD60xx-45-46-16 RT**
(Same Description as Above with 1" FNPT riser)

\$4,400 List

Note: For MX auxiliary rewind, ADD

\$350 List

Note: For additional width beyond a 24" B dimension,
ADD (per inch)

\$25 List

Model Number	Hose Capacity of Reel feet				Approx. Weight lb.		Reel Dimensions inches								X, Y Indicate Mounting Holes	
	I.D. (in)	1/2"	3/4"	1"	Net	Ship	A	B	C	D	E	F	G	H	X	Y
	O.D. (in)	7/8"	1-9/32"	1-9/16"												
HD6018-33-34-16		300	—	—	365	435	18	9.50	16	33.50	35	23.00	34	18.12	11	30.50
HD6018-39-40-16		—	300	—	490	560	18	9.50	16	39.50	41	24.00	40	20.50	11	36.50
HD6020-33-34-16		400	—	—	380	450	20	11.50	16	33.50	35	25.00	34	18.12	13	30.50
HD6020-39-40-16		—	400	—	505	575	20	11.50	16	39.50	41	26.00	40	20.50	13	36.50
HD6020-45-46-16		—	—	300	595	665	20	11.50	16	45.50	47	26.00	46	23.50	13	42.50
HD6022-33-34-16		500	—	—	395	465	22	13.50	16	33.50	35	27.00	34	18.12	15	30.50
HD6022-39-40-16		—	500	—	520	590	22	13.50	16	39.50	41	28.00	40	20.50	15	36.50
HD6022-45-46-16		—	—	400	610	680	22	13.50	16	45.50	47	28.00	46	23.50	15	42.50
HD6024-33-34-16		600	—	—	410	480	24	15.50	16	33.50	35	29.00	34	18.12	17	30.50
HD6024-45-46-16		—	—	500	625	695	24	15.50	16	45.50	47	30.00	46	23.50	17	42.50
HD6026-33-34-16		700	—	—	425	495	26	17.50	16	33.50	35	31.00	34	18.12	19	30.50